

Contents

Splitter

<u>AVSP-1202 2 Way Splitter 300W</u>	2
<u>AVSP-1203 3 Way Splitter 300W</u>	3
<u>AVSP-1204 3 Way Splitter 300W</u>	4
<u>AVSP-1202Y 2 Way Splitter 100W</u>	5
<u>AVSP-1203Y 3 Way Splitter 100W</u>	6
<u>AVSP-1204Y 4 Way Splitter 100W</u>	7
<u>AVSP-1202D 2 Way Splitter 700W DIN</u>	8
<u>AVSP-1203D 3 Way Splitte 700W DIN</u>	9
<u>AVSP-1204D 4 Way Splitter 700W DIN</u>	10
<u>AVSP-1302F V/UHF 2 Way Splitter</u>	11
<u>AVSP-1303F V/UHF 3 Way Splitter</u>	12
<u>AVSP-1304F V/UHF 4 Way Splitter</u>	13
<u>AVSP-1502 2 Way Splitter 700W DIN</u>	14
<u>AVSP-1503 3 Way Splitter 700W DIN</u>	15
<u>AVSP-2702F 2 Way Splitter 50W</u>	16
<u>AVSP-2703F 3 Way Splitter 50W</u>	17
<u>AVSP-2704F 4 Way Splitter 50W</u>	18
<u>AVSP-2702C 2 Way Splitter 50W</u>	19
<u>AVSP-2703C 3 Way Splitter 50W</u>	20
<u>AVSP-2704T 4 Way T Type Splitter 50W</u>	21
<u>AVSP-2702H 2 Way Splitter 50W</u>	22
<u>AVSP-2703J 3 Way Splitter 50W</u>	23
<u>AVSP-2704J 4 Way Splitter 50W</u>	24
<u>AVSP-3002F 2 Way UHF Splitter 100W</u>	25
<u>AVSP-3003F 3 Way UHF Splitter 100W</u>	26
<u>AVSP-3004F 4 Way UHF Splitter 100W</u>	27
<u>AVSP-2708 8 Way Splitter 100W</u>	28
<u>AVSP-9202 GSM 2Way Splitter 100W</u>	29
<u>AVSP-9203 GSM 3Way Splitter 100W</u>	30
<u>AVSP-9204 GSM 4Way Splitter 100W</u>	31
<u>AVSP-2502 GSM 2 Way Splitter 100W</u>	32
<u>AVSP-2503 GSM 3 Way Splitter 100W</u>	33


AVSP-1202

Data Sheet

- 1、 Model Number : AVSP-1202
- 2、 Product Name : 2 Way Splitter 300W
- 3、 Specification :

Frequency Range(MHz)	800~2500
Split Ratio(dB)	3.01
Insertion Loss(dB)	≤3.26
Band Ripple(dB)	≤±0.2
Return Loss(dB)	≥20
Amplitude Balance(dB)	≤0.2
Phase Balance(°)	≤5
Impedance(Ω)	50
IP3(dBc)	≤-140@+43dBm×2
Connectors	N-F
Power(W)	300
Temperature()	-30~+70
Dimensions(mm)	216×68×16
Weight(kg)	0.27

- 4、 Outlook :

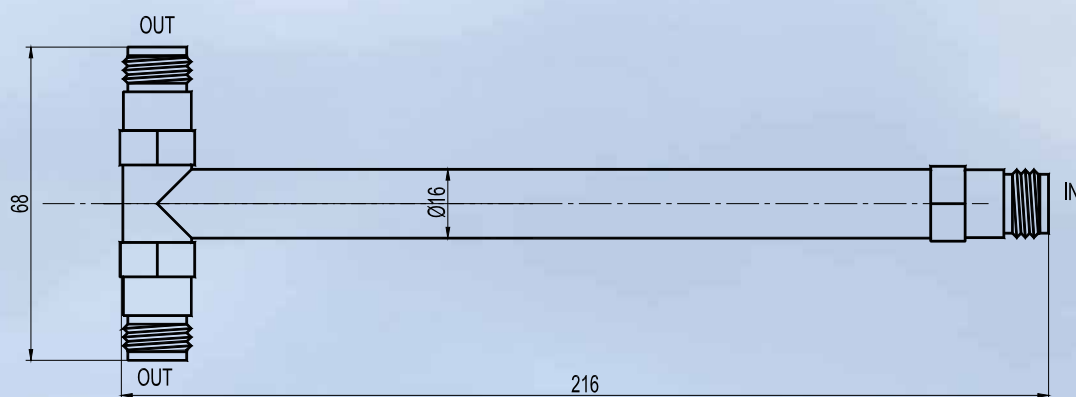


AVSP-1203

Data Sheet

- 1、 Model Number : AVSP-1203
- 2、 Product Name : 3 Way Splitter 300W
- 3、 Specification :

Frequency Range(MHz)	800~2500
Split Ratio(dB)	4.77
Insertion Loss(dB)	≤5.02
Band Ripple(dB)	≤±0.2
Return Loss(dB)	≥20
Amplitude Balance(dB)	≤0.2
Phase Balance(°)	≤5
Impedance(Ω)	50
IP3(dBc)	≤-140@+43dBm×2
Connectors	N-F
Power(W)	300
Temperature()	-40~+70
Dimensions(mm)	240×80×16
Weight(kg)	0.33

- 4、 Outlook :

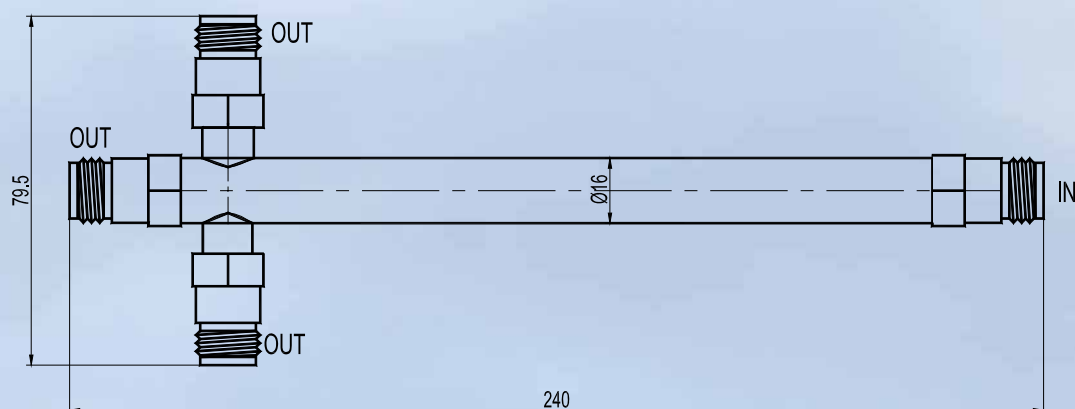


AVSP-1204

Data Sheet

- 1、 Model Number : AVSP-1204
- 2、 Product Name : 4 Way Splitter 300W
- 3、 Specification :

Frequency Range(MHz)	800~2500
Split Ratio(dB)	6.02
Insertion Loss(dB)	≤6.27
Band Ripple(dB)	≤±0.2
Return Loss(dB)	≥20
Amplitude Balance(dB)	≤0.2
Phase Balance(°)	≤5
Impedance(Ω)	50
IP3(dBc)	≤-140@+43dBm×2
Connectors	N-F
Power(W)	300
Temperature()	-40~+70
Dimensions(mm)	274×66×46
Weight(kg)	0.51

- 4、 Outlook :

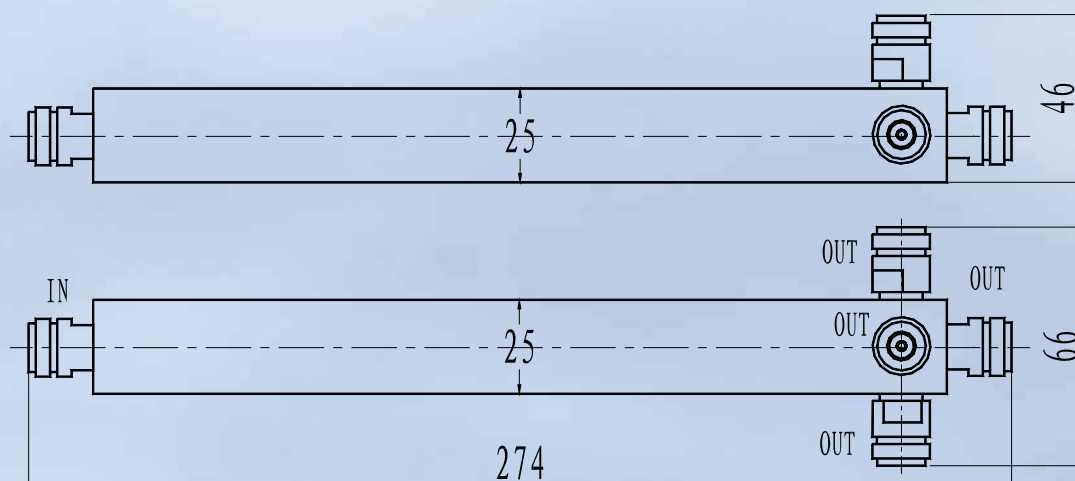


AVSP-1202Y

Data Sheet

- 1、 Model Number : AVSP-1202Y
- 2、 Product Name : 2 Way Splitter 100W
- 3、 Specification :

Frequency Range(MHz)	800~2500
Split Ratio(dB)	3.01
Insertion Loss(dB)	≤3.26
Band Ripple(dB)	≤±0.2
Return Loss(dB)	≥20
Amplitude Balance(dB)	≤0.2
Phase Balance(°)	≤5
Impedance(Ω)	50
IP3(dBc)	≤-140@+43dBm×2
Connectors	N-F
Power(W)	100
Temperature()	-30~+70
Dimensions(mm)	223×61×37
Weight(kg)	0.4

- 4、 Outlook :

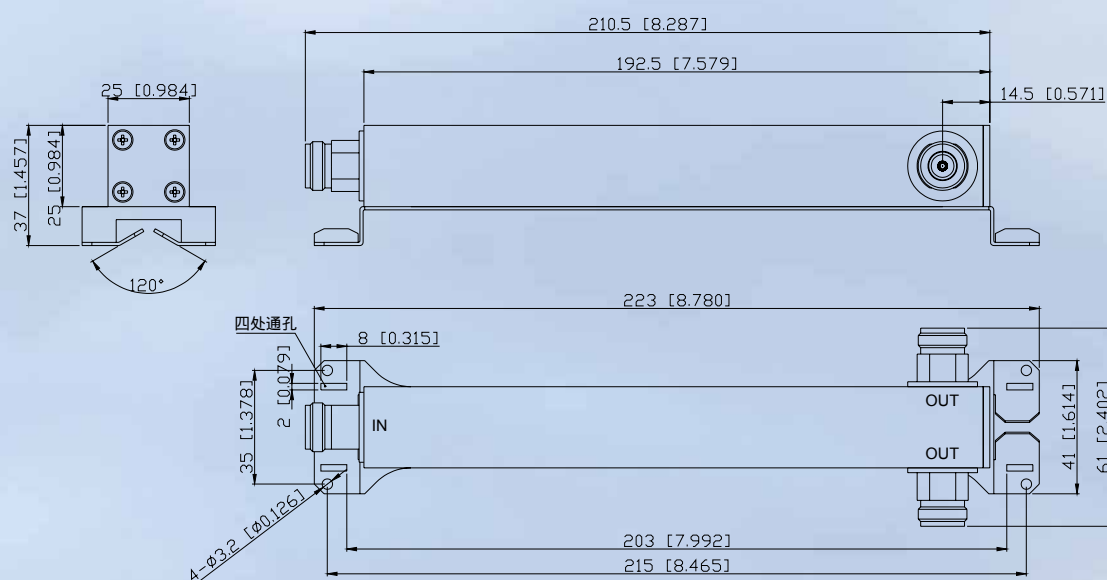


AVSP-1203Y

Data Sheet

- 1、 Model Number : AVSP-1203Y
2、 Product Name : 3 Way Splitter 100W
3、 Specification :

Frequency Band(MHz)	800~2500
Split Ratio(dB)	4.77
Insertion Loss(dB)	≤5.02
Band Ripple(dB)	≤±0.2
Isolation(dB)	-
Return Loss(dB)	≥20
Amplitude Balance(dB)	≤0.2
Phase Balance(°)	≤5
Impedance(Ω)	50
IP3(dBc)	≤-140@+43dBm×2
Connectors	N-F
Power(W)	100
Temperature()	-30~+70
Dimensions(mm)	236×61×37
Weight(kg)	0.48

- #### 4、 Outlook :

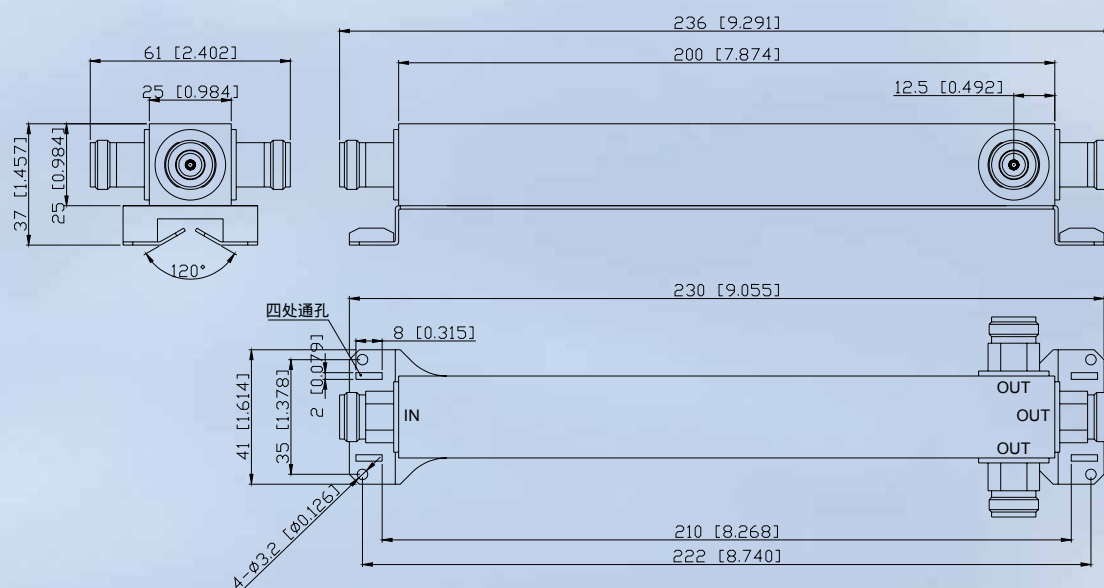


AVSP-1204Y

Data Sheet

- 1、 Model Number : AVSP-1204Y
- 2、 Product Name : 4 Way Splitter 100W
- 3、 Specification :

Frequency Range(MHz)	800~2500
Split Ratio(dB)	6.02
Insertion Loss(dB)	≤6.27
Band Ripple(dB)	≤±0.2
Isolation(dB)	-
Return Loss(dB)	≥20
Amplitude Balance(dB)	≤0.2
Phase Balance(°)	≤5
Impedance(Ω)	50
IP3(dBc)	≤-140@+43dBm×2
Connectors	N-F
Power(W)	100
Temperature()	-30~+70
Dimensions(mm)	233×61×55
Weight(kg)	0.51

- 4、 Outdoor :

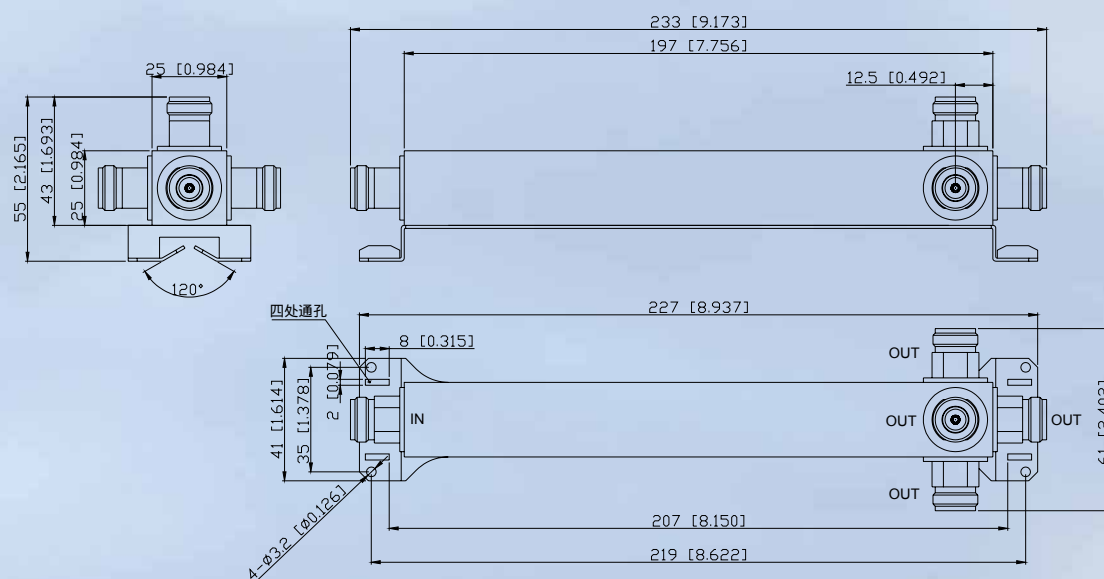


AVSP-1202D

Data Sheet

- 1、 Model Number : AVSP-1202D
- 2、 Product Name : 2 Way Splitter 700W DIN
- 3、 Specification :

Frequency Range(MHz)	800~2500
Split Ratio(dB)	3.01
Insertion Loss(dB)	≤3.3
Band Ripple(dB)	≤±0.2
Isolation(dB)	-
Return Loss(dB)	≥20
Amplitude Balance(dB)	≤0.2
Phase Balance(°)	≤5
Impedance(Ω)	50
IP3(dBc)	≤-140@+43dBm×2
Connectors	DIN-F
Power(W)	700
Temperature()	-30~+70
Dimensions(mm)	246×82×38
Weight(kg)	1.08

- 4、 外形圖 :

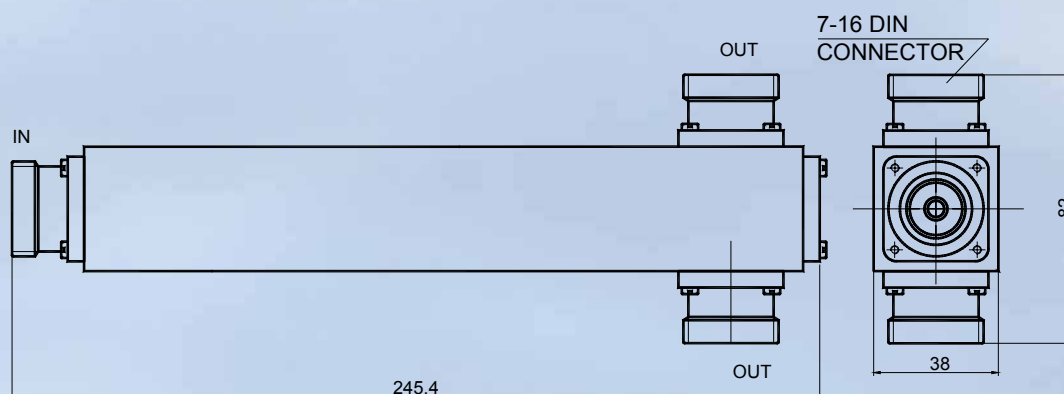


AVSP-1203D

Data Sheet

- 1、 Model Number : AVSP-1203D
- 2、 Product Name : 3 Way Splitter 700W DIN
- 3、 Specification :

Frequency Range(MHz)	800~2500
Split Ratio(dB)	4.77
Insertion Loss(dB)	≤5.2
Band Ripple(dB)	≤±0.2
Isolation(dB)	-
Return Loss(dB)	≥18
Amplitude Balance(dB)	≤0.2
Phase Balance(°)	≤5
Impedance(Ω)	50
IP3(dBc)	≤-140@+43dBm×2
Connectors	DIN-F
Power(W)	700
Temperature()	-30~+70
Dimensions(mm)	262×82×38
Weight(kg)	1.17

- 4、 Outlook :

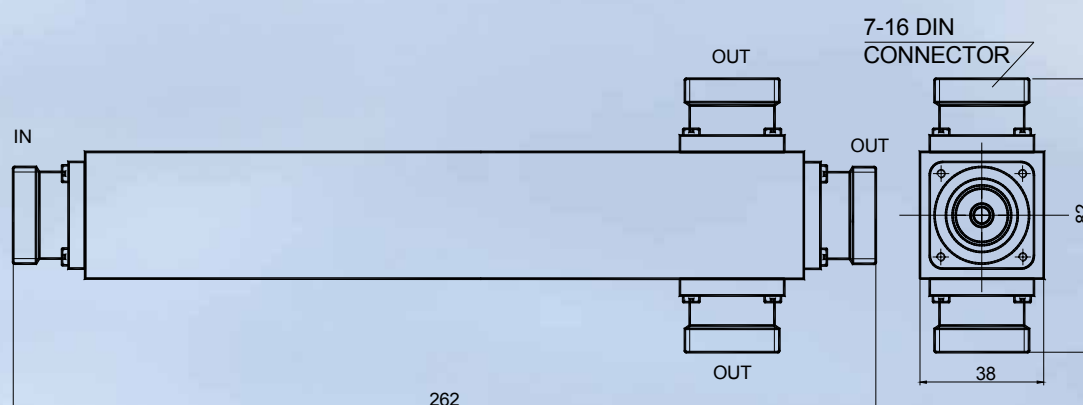


AVSP-1204D

Data Sheet

- 1、 Model Number : AVSP-1204D
- 2、 Product Name : 4 Way Splitter 700W DIN
- 3、 Specification :

Frequency Range(MHz)	800~2500
Split Ratio(dB)	6.02
Insertion Loss(dB)	≤6.32
Band Ripple(dB)	≤±0.2
Isolation(dB)	-
Return Loss(dB)	≥20
Amplitude Balance(dB)	≤0.2
Phase Balance(°)	≤5
Impedance(Ω)	50
IP3(dBc)	≤-140@+43dBm×2
Connectors	DIN-F
Power(W)	700
Temperature()	-30~+70
Dimensions(mm)	296×82×60
Weight(kg)	-

- 4、 Outlook :

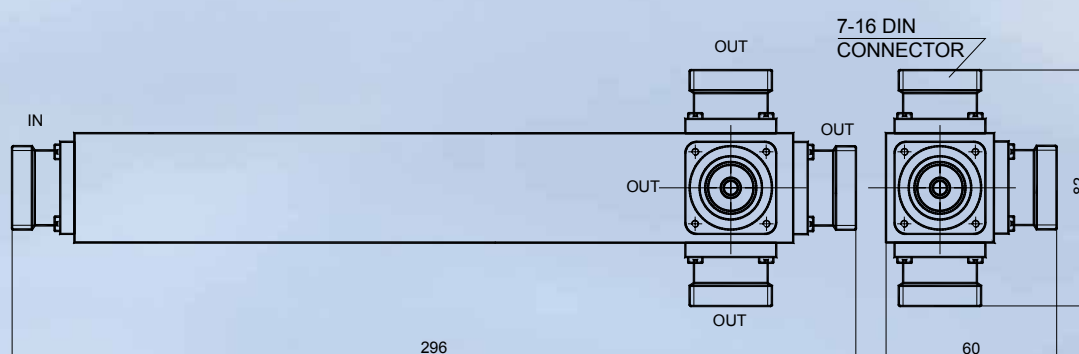


AVSP-1302F

Data Sheet

- 1、 Model Number : AVSP-1302F
- 2、 Product Name : V/UHF 2 Way Splitter
- 3、 Specification :

Frequency Range(MHz)	100~500
Split Ratio(dB)	3.01
Insertion Loss(dB)	≤ 3.5
Band Ripple(dB)	$\leq \pm 0.3$
Isolation(dB)	≥ 14
Return Loss(dB)	≥ 18
Amplitude Balance(dB)	≤ 0.3
Phase Balance($^{\circ}$)	≤ 5
Impedance(Ω)	50
IP3(dBc)	$\leq -140 @ +43\text{dBm} \times 2$
Connectors	N-F
Power(W)	100
Temperature()	-30~+70
Dimensions(mm)	148×148×24
Weight(kg)	0.82

- 4、 Outlook :

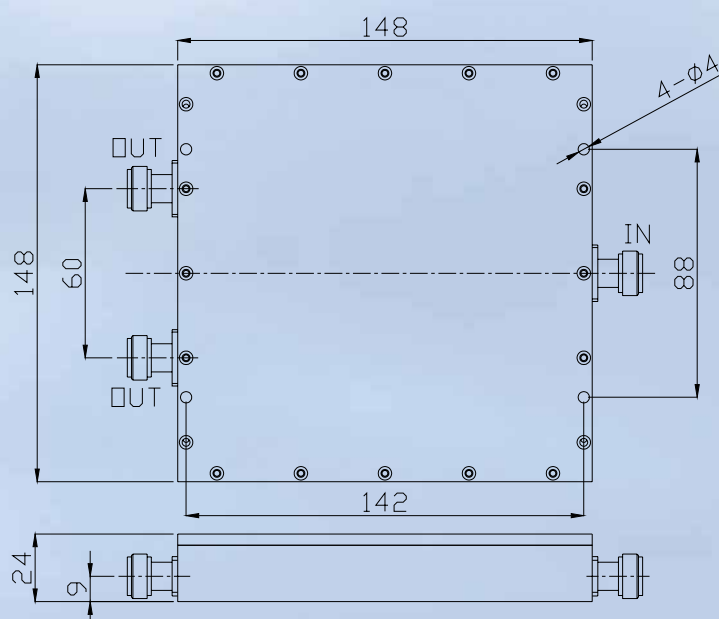


AVSP-1303F

Data Sheet

- 1、 Model Number : AVSP-1303F
- 2、 Product Name : V/UHF 3 Way Splitter
- 3、 Specification :

Frequency Range(MHz)	100~500
Split Ratio(dB)	4.8
Insertion Loss(dB)	≤5.8
Band Ripple(dB)	-
Isolation(dB)	≥18
Return Loss(dB)	≥18
Amplitude Balance(dB)	-
Phase Balance(°)	-
Impedance(Ω)	50
IP3(dBc)	≤-140@+43dBm×2
Connectors	N-F
Power(W)	100
Temperature()	-30~+70
Dimensions(mm)	264×185×23
Weight(kg)	1.8

- 4、 Outlook :

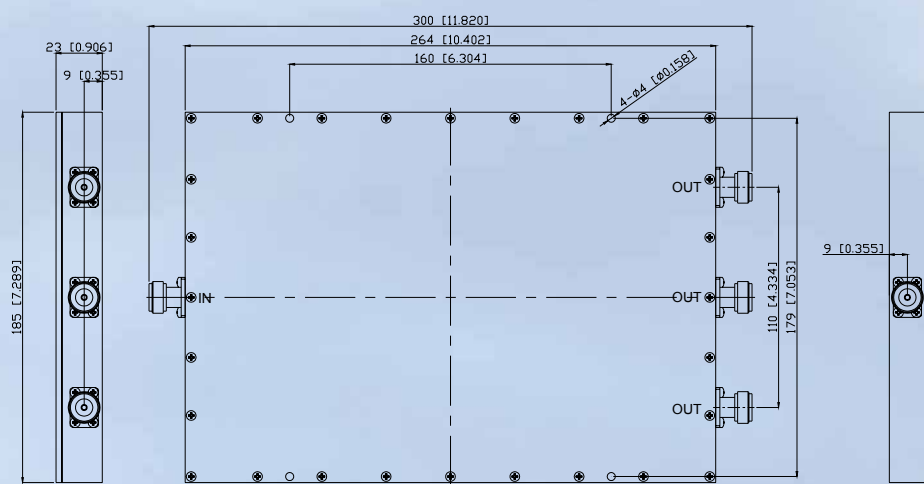


AVSP-1304F

Data Sheet

- 1、 Model Number : AVSP-1304F
- 2、 Product Name : V/UHF 4 Way Splitter
- 3、 Specification :

Frequency Range(MHz)	100~500
Split Ratio(dB)	6
Insertion Loss(dB)	≤7.0
Isolation(dB)	≥18
Return Loss(dB)	≥18
Amplitude Balance(dB)	≤0.4
Phase Balance(°)	≤5
Impedance(Ω)	50
Connectors	N-F
Power(W)	100
Temperature()	-30~+70
Dimensions(mm)	320×230×23
Weight(kg)	2.6

- 4、 Outlook :

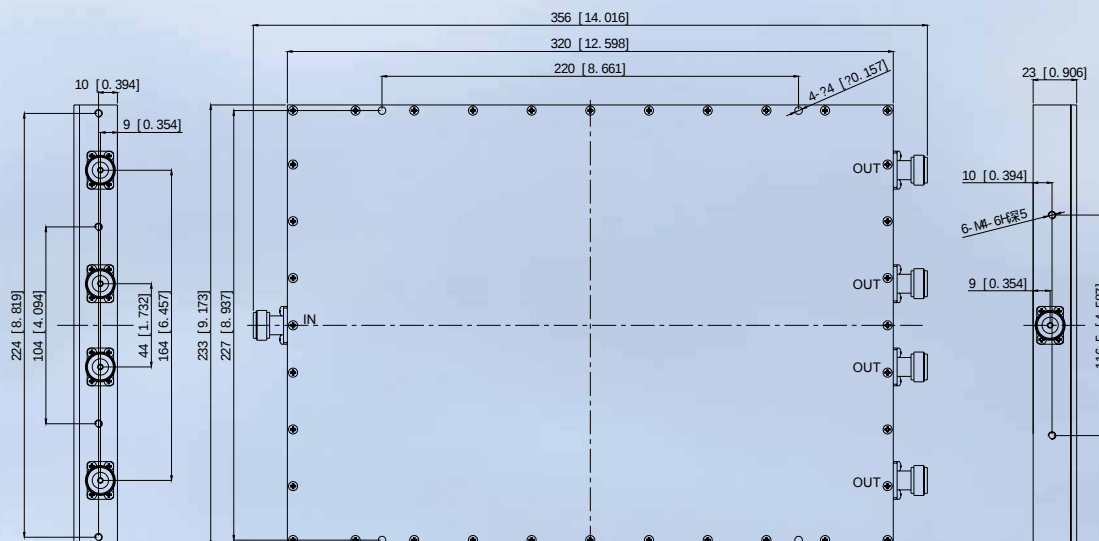


AVSP-1502

Data Sheet

- 1、 Model Number : AVSP-1502
- 2、 Product Name : 2 Way Splitter 700W DIN
- 3、 Specification :

Frequency Range(MHz)	825~960
Split Ratio(dB)	3.01
Insertion Loss(dB)	≤ 3.26
Band Ripple(dB)	$\leq \pm 0.2$
Isolation(dB)	-
Return Loss(dB)	≥ 20
Amplitude Balance(dB)	≤ 0.2
Phase Balance($^{\circ}$)	≤ 5
Impedance(Ω)	50
IP3(dBc)	$\leq -140 @ +43\text{dBm} \times 2$
Connectors	DIN-F
Power(W)	700
Temperature()	-30~+70
Dimensions(mm)	163×82×38
Weight(kg)	0.76

- 4、 Outlook :

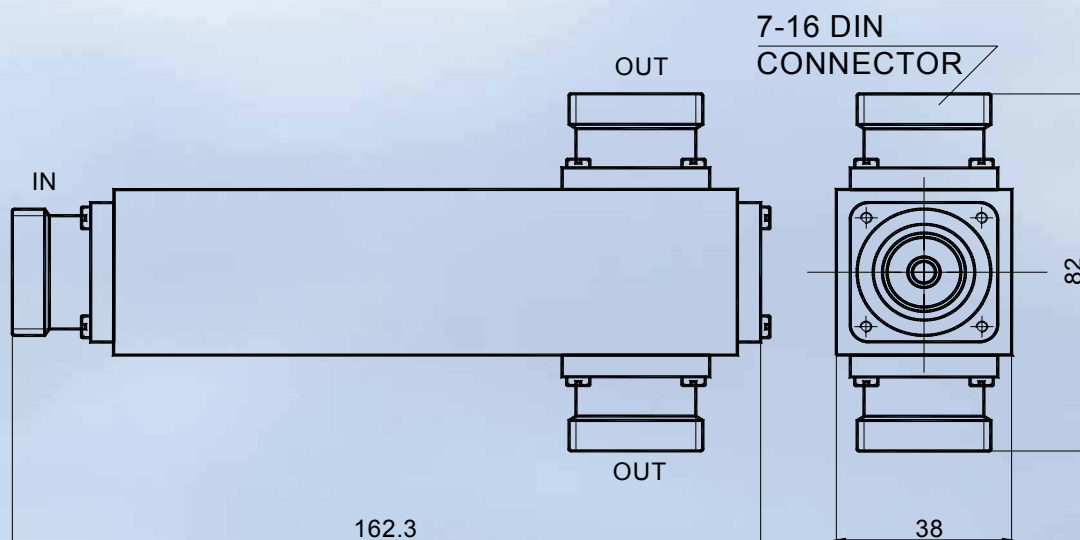


AVSP-1503

Data Sheet

- 1、 Model Numbe : AVSP-1503
- 2、 Product Name : 3 Way Splitter 700W DIN
- 3、 Specification :

Frequency Range(MHz)	825~960
Split Ratio(dB)	4.77
Insertion Loss(dB)	≤5.02
Band Ripple(dB)	≤±0.2
Isolation(dB)	-
Return Loss(dB)	≥19
Amplitude Balance(dB)	≤0.2
Phase Balance(°)	≤5
Impedance(Ω)	50
IP3(dBc)	≤-140@+43dBm×2
Connectors	DIN-F
Power(W)	700
Temperature()	-30~+70
Dimensions(mm)	164×82×38
Weight(kg)	0.78

- 4、 Outlook :

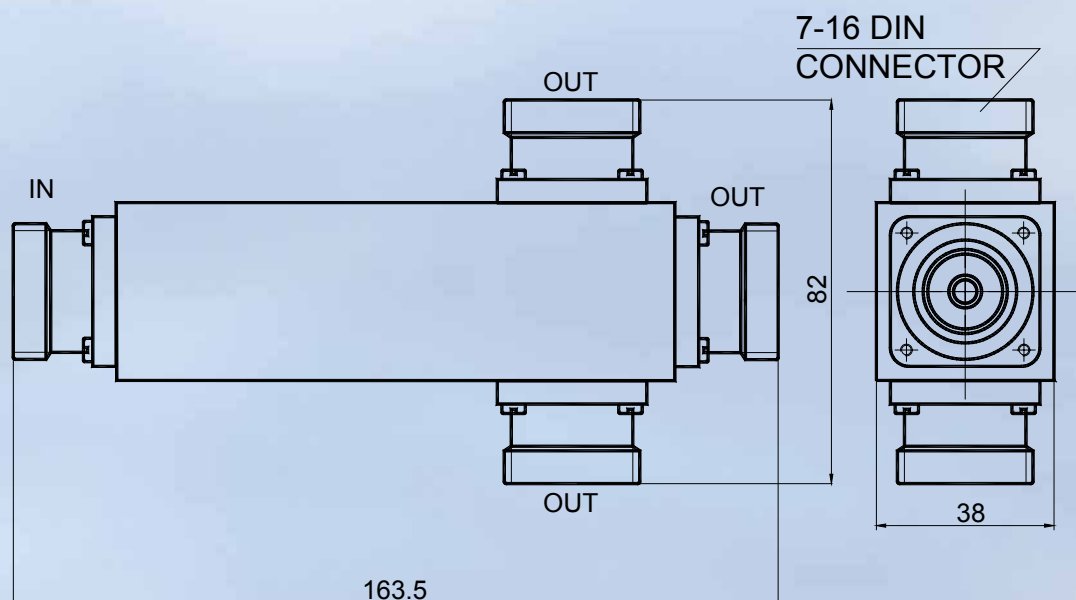


AVSP-2702F

Data Sheet

- 1、 Model Numbe : AVSP-2702F
- 2、 Product Name : 2 Way Splitter 50W
- 3、 Specification :

Frequency Range(MHz)	800~2500
Split Ratio(dB)	3.01
Insertion Loss(dB)	≤3.4
Band Ripple(dB)	-
Isolation(dB)	≥20
Return Loss(dB)	≥20
Amplitude Balance(dB)	≤0.2
Phase Balance(°)	≤5
Impedance(Ω)	50
IP3(dBc)	≤-140@+43dBm×2
Connectors	N-F
Power(W)	50
Temperature()	-30~+70
Dimensions(mm)	107×57×22
Weight(kg)	-

- 4、 Outlook :

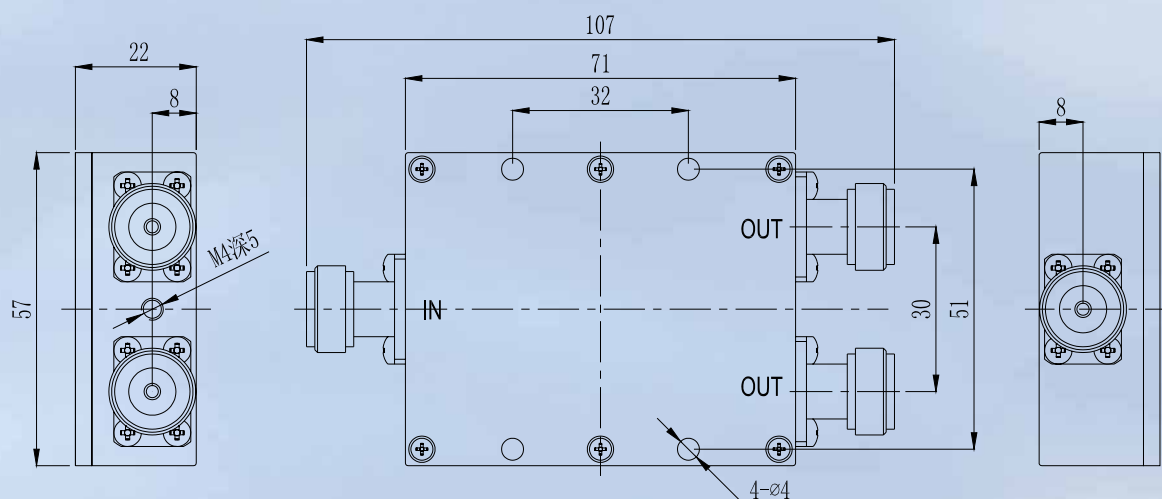


AVSP-2703F

Data Sheet

- 1、Model Numbe : AVSP-2703F
- 2、Product Name : 3 Way Splitter 50W
- 3、Specification :

Frequency Range(MHz)	800~2500
Split Ratio(dB)	4.77
Insertion Loss(dB)	≤5.3
Band Ripple(dB)	-
Isolation(dB)	≥20
Return Loss(dB)	≥18
Amplitude Balance(dB)	≤0.2
Phase Balance(°)	≤5
Impedance(Ω)	50
IP3(dBc)	≤-140@+43dBm×2
Connectors	N-F
Power(W)	50
Temperature()	-30~+70
Dimensions(mm)	129×89×22
Weight(kg)	0.25

- 4、Outlook :

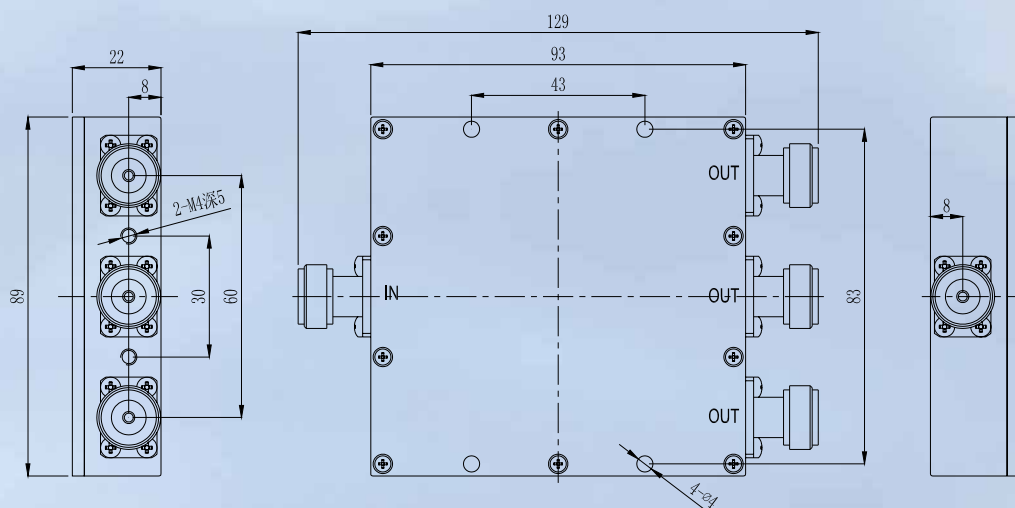


AVSP-2704F

Data Sheet

- 1、 Model Number : AVSP-2704F
- 2、 Product Name : 4 Way Splitter 50W
- 3、 Specification :

Frequency Range(MHz)	800~2500
Split Ratio(dB)	6.02
Insertion Loss(dB)	≤6.6
Band Ripple(dB)	-
Isolation(dB)	≥20
Return Loss(dB)	≥18
Amplitude Balance(dB)	≤0.2
Phase Balance(°)	≤5
Impedance(Ω)	50
IP3(dBc)	≤-140@+43dBm×2
Connectors	N-F
Power(W)	100
Temperature()	-30~+70
Dimensions(mm)	129×119×22
Weight(kg)	0.5

- 4、 Outlook :

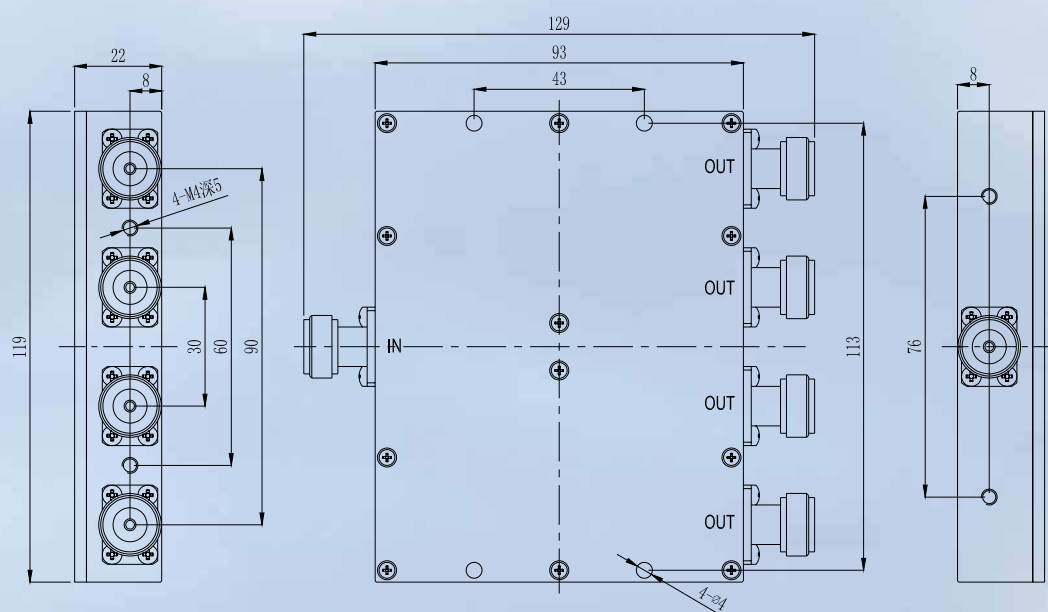


AVSP-2702C

Data Sheet

- 1、 Model Number : AVSP-2702C
- 2、 Product Name : 2 Way Splitter 50W
- 3、 Specification :

Frequency Range(MHz)	800~2500
Split Ratio(dB)	3.01
Insertion Loss(dB)	≤3.3
Isolation(dB)	≥20
Return Loss(dB)	≥20
Amplitude Balance(dB)	≤0.2
Impedance(Ω)	50
IP3(dBc)	≤-140@+43dBm×2
Connectors	N-F
Power(W)	50
Temperature()	-30~+70
Dimensions(mm)	90×64×28.4
Weight(kg)	0.21

- 4、 Outlook :

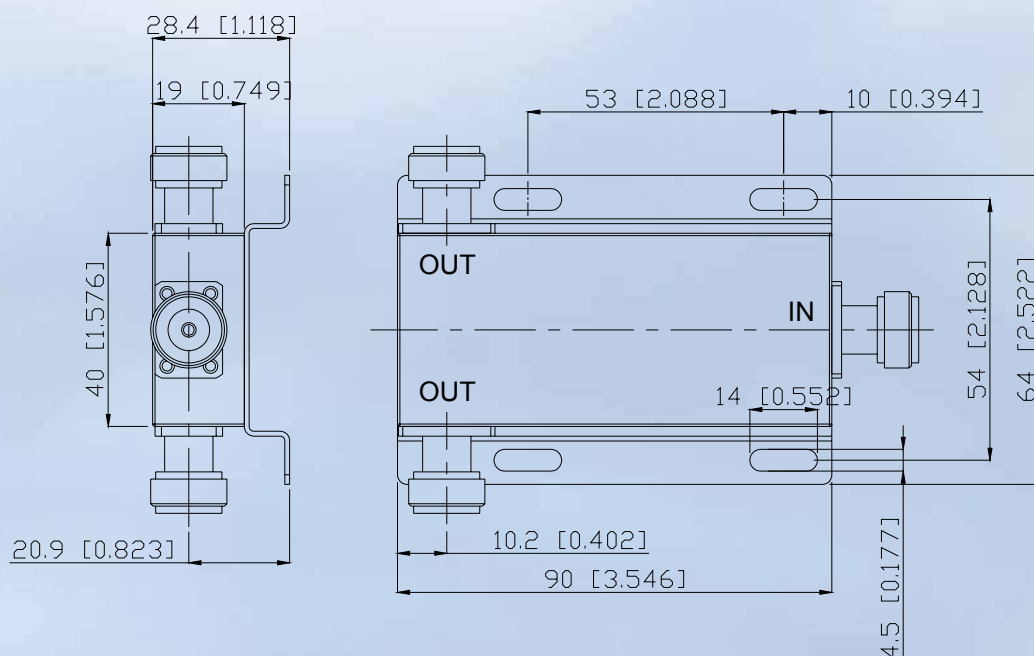


AVSP-2703C

Data Sheet

- 1、 Model Number : AVSP-2703C
- 2、 Product Name : 3 Way Splitter 50W
- 3、 Specification :

Frequency Range(MHz)	800~2500
Split Ratio(dB)	4.77
Insertion Loss(dB)	≤5.3
Band Ripple(dB)	-
Isolation(dB)	≥20
Return Loss(dB)	≥20
Amplitude Balance(dB)	≤0.2
Phase Balance(°)	≤5
Impedance(Ω)	50
IP3(dBc)	≤-140@+43dBm×2
Connectors	N-F
Power(W)	50
Temperature()	-30~+70
Dimensions(mm)	90×40×19
Weight(kg)	-

- 4、 Outlook :

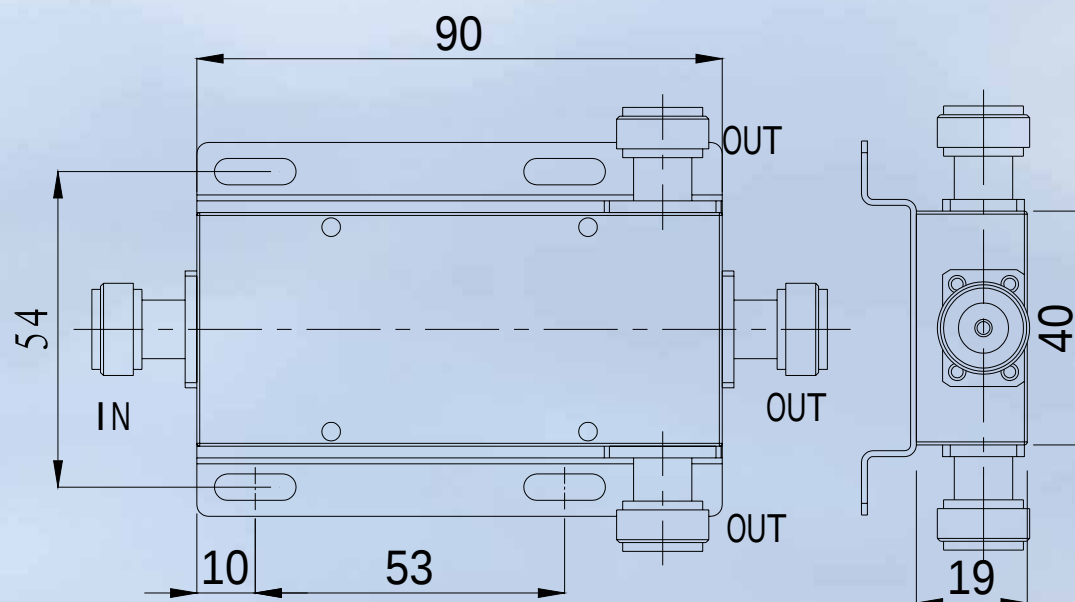


AVSP-2704T

Data Sheet

- 1、 Model Number : AVSP-2704T
- 2、 Product Name : 4 Way Splitter 50W T Type
- 3、 Specification :

Frequency Range(MHz)	800~2500
Split Ratio(dB)	6.02
Insertion Loss(dB)	≤6.6
Band Ripple(dB)	≤±0.2
Isolation(dB)	≥20
Return Loss(dB)	≥20
Amplitude Balance(dB)	≤0.2
Phase Balance(°)	-
Impedance(Ω)	50
IP3(dBc)	≤-140@+43dBm×2
Connectors	N-F
Power(W)	50
Temperature()	-30~+70
Dimensions(mm)	108×72×23
Weight(kg)	-

- 4、 Outlook :

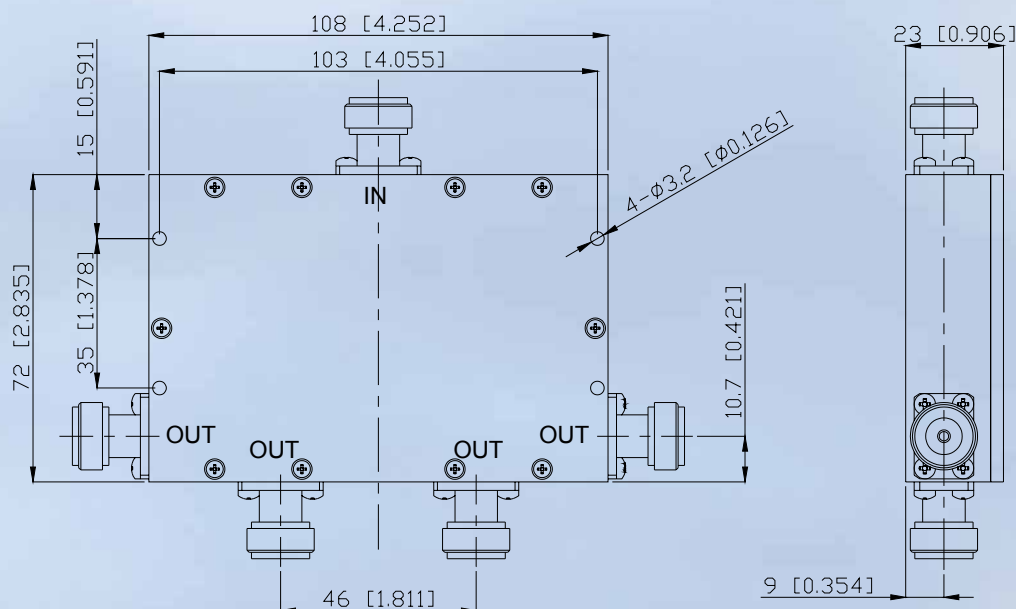


AVSP-2702H

Data Sheet

- 1、 Model Number : AVSP-2702H
- 2、 Product Name : 2 Way Splitter 50W
- 3、 Specification :

Frequency Range(MHz)	800~2500
Split Ratio(dB)	3.01
Insertion Loss(dB)	≤3.26
Band Ripple(dB)	≤±0.2
Isolation(dB)	≥20
Return Loss(dB)	≥20
Amplitude Balance(dB)	≤0.3
Phase Balance(°)	≤5
Impedance(Ω)	50
IP3(dBc)	≤-140@+43dBm×2
Connectors	N-F
Power(W)	50
Temperature()	-25~+75
Dimensions(mm)	-
Weight(kg)	-

- 4、 Outlook :

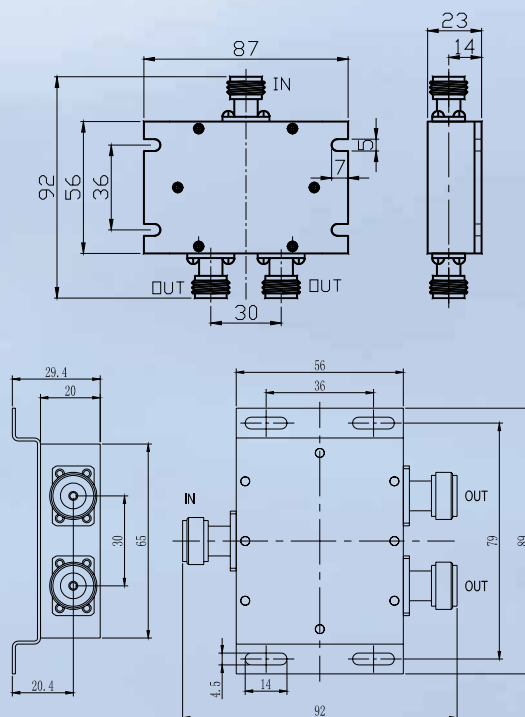


AVSP-2703J

Data Sheet

- 1、 Model Number : AVSP-2703J
- 2、 Product Name : 3 Way Splitter 50W
- 3、 Specification :

Frequency Range(MHz)	800~2500
Split Ratio(dB)	4.77
Insertion Loss(dB)	≤5.3
Band Ripple(dB)	≤±0.3
Isolation(dB)	≥20
Return Loss(dB)	≥19
Amplitude Balance(dB)	≤0.2
Phase Balance(°)	-
Impedance(Ω)	50
IP3(dBc)	≤-140@+43dBm×2
Connectors	N-F
Power(W)	50
Temperature()	-30~+70
Dimensions(mm)	93×89×19
Weight(kg)	-

- 4、 Outlook :

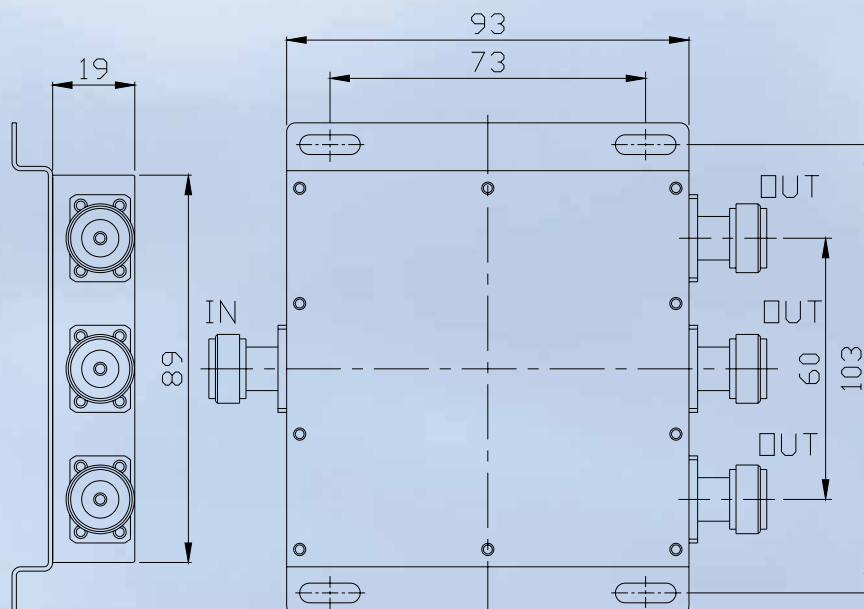


AVSP-2704J

Data Sheet

- 1、 Model Number : AVSP-2704J
- 2、 Product Name : 4 Way Splitter 50W
- 3、 Specification :

Frequency Range(MHz)	800~2500
Split Ratio(dB)	6.02
Insertion Loss(dB)	≤6.5
Band Ripple(dB)	≤±0.3
Isolation(dB)	≥20
Return Loss(dB)	≥19
Amplitude Balance(dB)	≤0.2
Phase Balance(°)	≤5
Impedance(Ω)	50
IP3(dBc)	≤-140@+43dBm×2
Connectors	N-F
Power(W)	50
Temperature()	-30~+70
Dimensions(mm)	93×119×19
Weight(kg)	-

- 4、 Outlook :

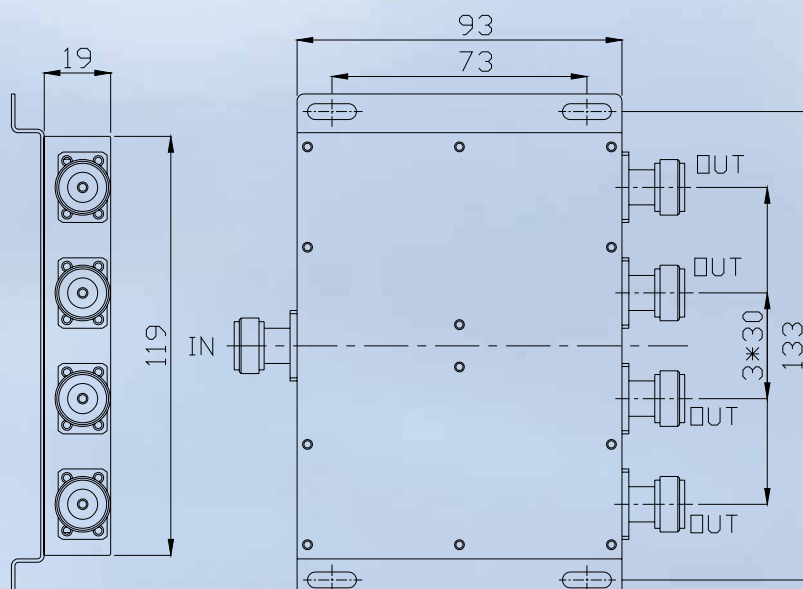


AVSP-3002F

Data Sheet

- 1、 Model Number : AVSP-3002F
- 2、 Product Name : UHF 2 Way Splitter 100W
- 3、 Specification :

Frequency Range(MHz)	400~520
Split Ratio(dB)	3.01
Insertion Loss(dB)	≤3.4
Band Ripple(dB)	≤±0.2
Isolation(dB)	≥18
Return Loss(dB)	≥18
Amplitude Balance(dB)	≤0.2
Phase Balance(°)	≤5
Impedance(Ω)	50
IP3(dBc)	≤-140@+43dBm×2
Connectors	N-F
Power(W)	100
Temperature()	-30~+70
Dimensions(mm)	63×62×21
Weight(kg)	0.19

- 4、 Outlook :

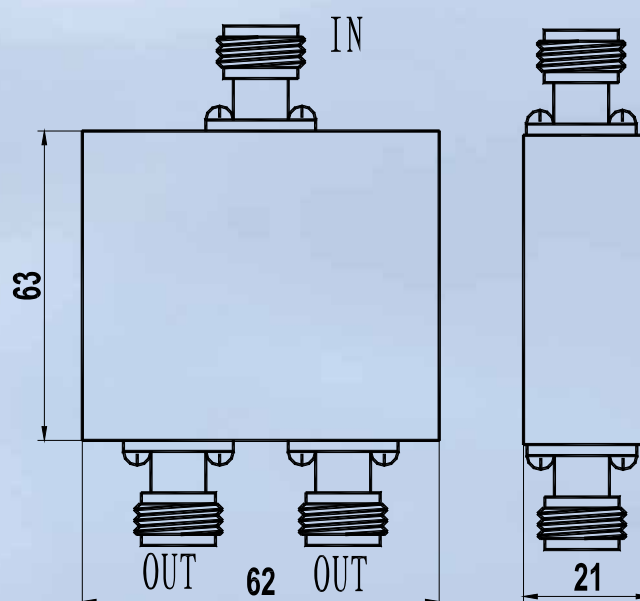


AVSP-3003F

Data Sheet

- 1、 Model Number : AVSP-3003F
- 2、 Product Name : UHF 3 Way Splitter 100W
- 3、 Specification :

Frequency Range(MHz)	400~520
Split Ratio(dB)	4.77
Insertion Loss(dB)	≤5.3
Band Ripple(dB)	≤±0.2
Isolation(dB)	≥18
Return Loss(dB)	≥18
Amplitude Balance(dB)	≤0.2
Phase Balance(°)	≤5
Impedance(Ω)	50
IP3(dBc)	≤-140@+43dBm×2
Connectors	N-F
Power(W)	100
Temperature()	-30~+70
Dimensions(mm)	95×62×21
Weight(kg)	0.28

- 4、 Outlook :

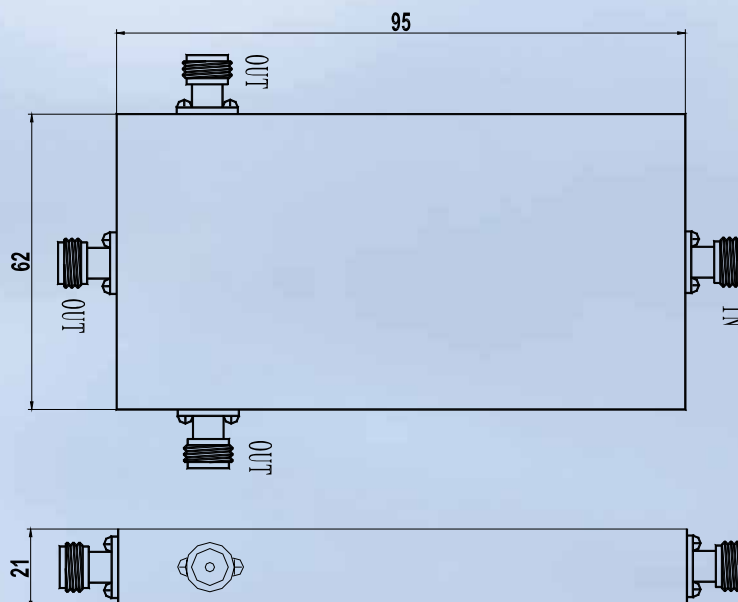


AVSP-3004F

Data Sheet

- 1、 Model Number : AVSP-3004F
- 2、 Product Name : UHF 4 Way Splitter 100W
- 3、 Specification :

Frequency Range(MHz)	400~520
Split Ratio(dB)	6.02
Insertion Loss(dB)	≤6.4
Band Ripple(dB)	≤±0.2
Isolation(dB)	≥18
Return Loss(dB)	≥18
Amplitude Balance(dB)	≤0.2
Phase Balance(°)	≤5
Impedance(Ω)	50
IP3(dBc)	≤-140@+43dBm×2
Connectors	N-F
Power(W)	100
Temperature()	-30~+70
Dimensions(mm)	122×89×21
Weight(kg)	0.45

- 4、 Outlook :

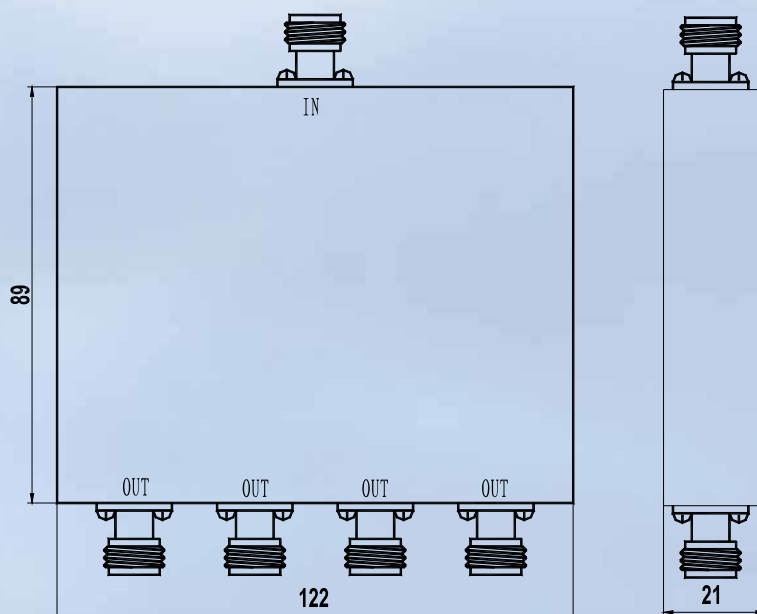


AVSP-2708

Data Sheet

- 1、 Model Number : AVSP-2708
- 2、 Product Name : 8 Way Splitter 100W
- 3、 Specification :

Frequency Range(MHz)	825~960/1710~2500
Split Ratio(dB)	9.03
Insertion Loss(dB)	≤10.5
Band Ripple(dB)	-
Isolation(dB)	≥18
Return Loss(dB)	≥18
Amplitude Balance(dB)	-
Phase Balance(°)	-
Impedance(Ω)	50
IP3(dBc)	≤-140@+43dBm×2
Connectors	N-F
Power(W)	100
Temperature()	-30~+70
Dimensions(mm)	269×210×23
Weight(kg)	2.1

- 4、 Outlook :

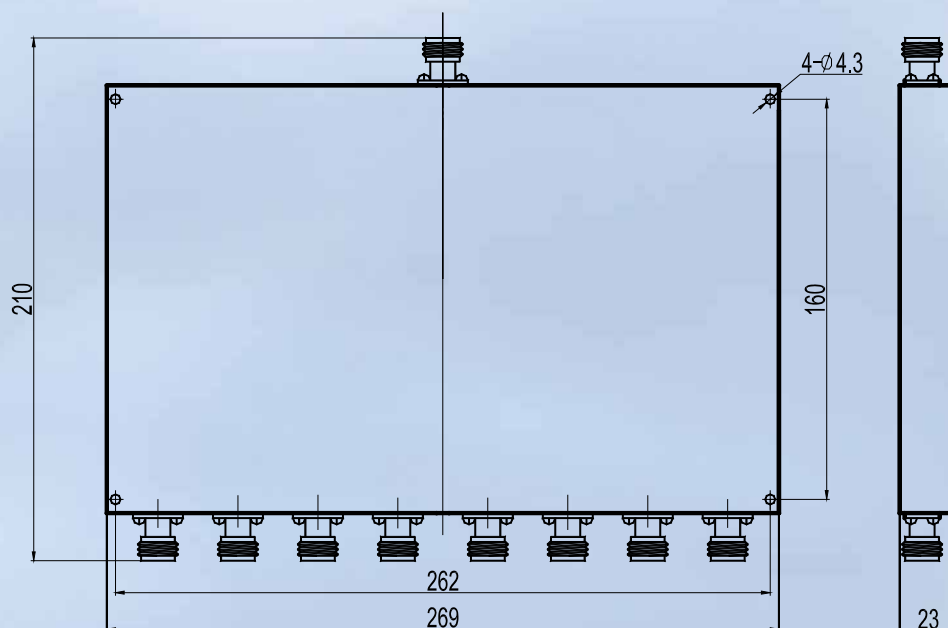


AVSP-9202

Data Sheet

- 1、 Model Number : AVSP-9202
- 2、 Product Name : 2 Way Splitter 100W
- 3、 Specification :

Frequency Range(MHz)	824~960
Split Ratio(dB)	4.8/1.8
Insertion Loss(dB)	≤5.1/2.1
Band Ripple(dB)	≤±0.2
Isolation(dB)	≥20
Return Loss(dB)	≥18
Amplitude Balance(dB)	-
Phase Balance(°)	-
Impedance(Ω)	50
IP3(dBc)	≤-140@+43dBm×2
Connectors	N-F
Power(W)	100
Temperature()	-30~+70
Dimensions(mm)	87×60×23
Weight(kg)	-

- 4、 Outlook :

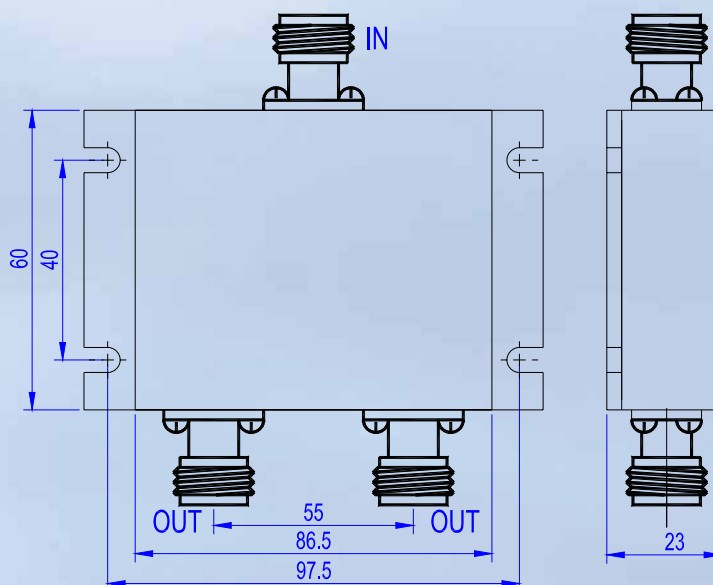


AVSP-9203

Data Sheet

- 1、 Model Number : AVSP-9203
- 2、 Product Name : 2 Way Splitter 100W
- 3、 Specification :

Frequency Range(MHz)	824~960
Split Ratio(dB)	6.0/1.3
Insertion Loss(dB)	≤6.3/1.6
Band Ripple(dB)	≤±0.2
Isolation(dB)	≥20
Return Loss(dB)	≥18
Amplitude Balance(dB)	-
Phase Balance(°)	-
Impedance(Ω)	50
IP3(dBc)	≤-140@+43dBm×2
Connectors	N-F
Power(W)	100
Temperature()	-30~+70
Dimensions(mm)	87×60×23
Weight(kg)	-

- 4、 Outlook :

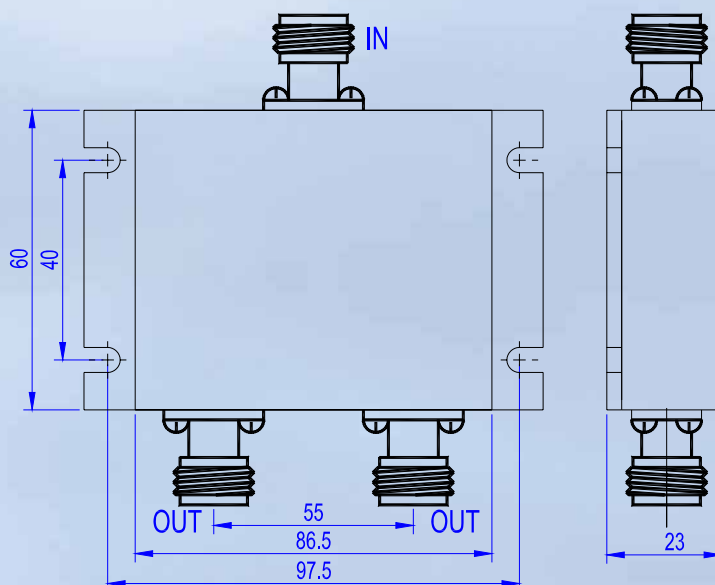


AVSP-9204

Data Sheet

- 1、 Model Number : AVSP-9204
- 2、 Product Name : 2 Way Splitter 100w
- 3、 Specification :

Frequency Range(MHz)	824~960
Split Ratio(dB)	7.0/1.0
Insertion Loss(dB)	≤7.3/1.3
Band Ripple(dB)	≤±0.2
Isolation(dB)	≥20
Return Loss(dB)	≥18
Amplitude Balance(dB)	-
Phase Balance(°)	-
Impedance(Ω)	50
IP3(dBc)	≤-140@+43dBm×2
Connectors	N-F
Power(W)	100
Temperature()	-30~+70
Dimensions(mm)	87×60×23
Weight(kg)	-

- 4、 Outlook :

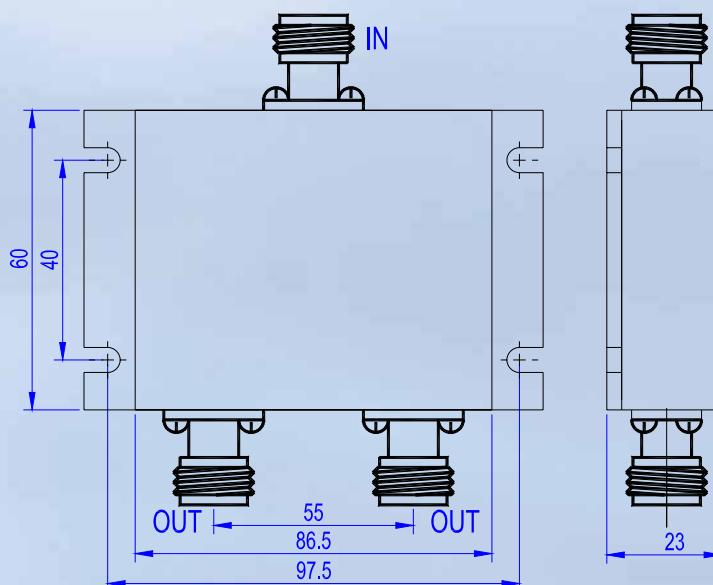


AVSP-2502

Data Sheet

- 1、 Model Number : AVSP-2502
- 2、 Product Name : 2 Way Splitter 50W
- 3、 Specification :

Frequency Range(MHz)	824~960
Split Ratio(dB)	3.01
Insertion Loss(dB)	≤3.26
Band Ripple(dB)	≤±0.2
Isolation(dB)	≥20
Return Loss(dB)	≥20
Amplitude Balance(dB)	≤0.2
Phase Balance(°)	≤5
Impedance(Ω)	50
IP3(dBc)	≤-140@+43dBm×2
Connectors	N-M/N-F
Power(W)	50
Temperature()	-30~+70
Dimensions(mm)	95×57×37
Weight(kg)	0.67

- 4、 Outlook :

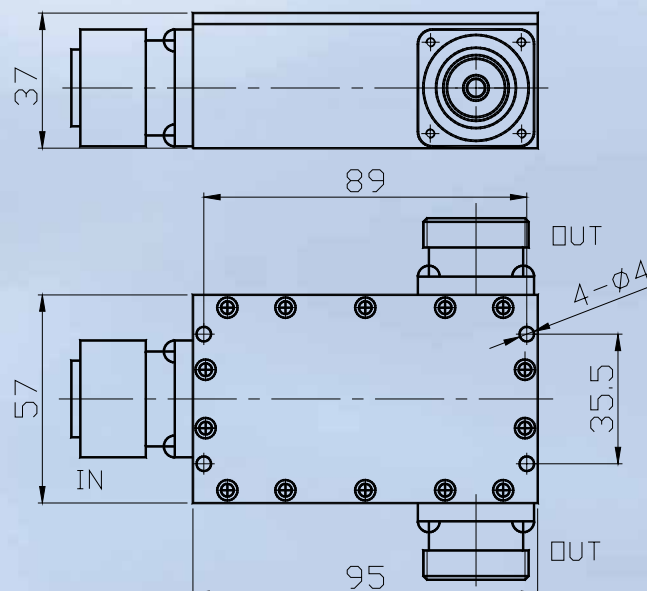

AVSP-2503

Data Sheet

- 1、 Model Number : AVSP-2503
- 2、 Product Name : 3 Way Splitter 50W
- 3、 Specification :

Frequency Range(MHz)	824~960
Split Ratio(dB)	4.77
Insertion Loss(dB)	≤5.07
Band Ripple(dB)	≤±0.2
Isolation(dB)	≥20
Return Loss(dB)	≥20
Amplitude Balance(dB)	≤0.2
Phase Balance(°)	≤5
Impedance(Ω)	50
IP3(dBc)	≤-140@+43dBm×2
Connectors	N-M/N-F
Power(W)	50
Temperature()	-30~+70
Dimensions(mm)	95×57×37
Weight(kg)	0.75

- 4、 Outlook :

